W 83320F15

D15″ H22″ L6

We are dedicated to providing the finest quality crystal chandelier for our customers. Our master craftsmen and designer pride themselves on their attention to detail. prompt,efficient service is our priority.
Enclosed,are detailed instructions on how to properly install your chandelier.Please read all instructions carefully and thoroughly.If you have any questions please fell free to call our toll free DHANDELIER HOTLINE AT:

1-855-411-8999

Crystal Dressing Instructions

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

A
14mmX1
2″
24strings

B
14mmX1
3″
3strings

C
14mmX2
3″
3strings

D
14mmX2
3″
3strings

E
14mmX4
3″
3strings

F
14mmX5
50mm
1string

G
14mmX3 14mmX3
14mmX1
14mmX2
2.5″
6strings

H
14mmX4 14mmX4
14mmX1
14mmX1
3″
6strings

Existing Electrical Box



Crossbar Screws



Crossbar Screws x 2(not srpplied)

Flowers

Canopy

Chains

Wire Connector

Shrinkable tube



Cable tie

Ground Wire

CANOPY INSTALLATION DIAGRAM

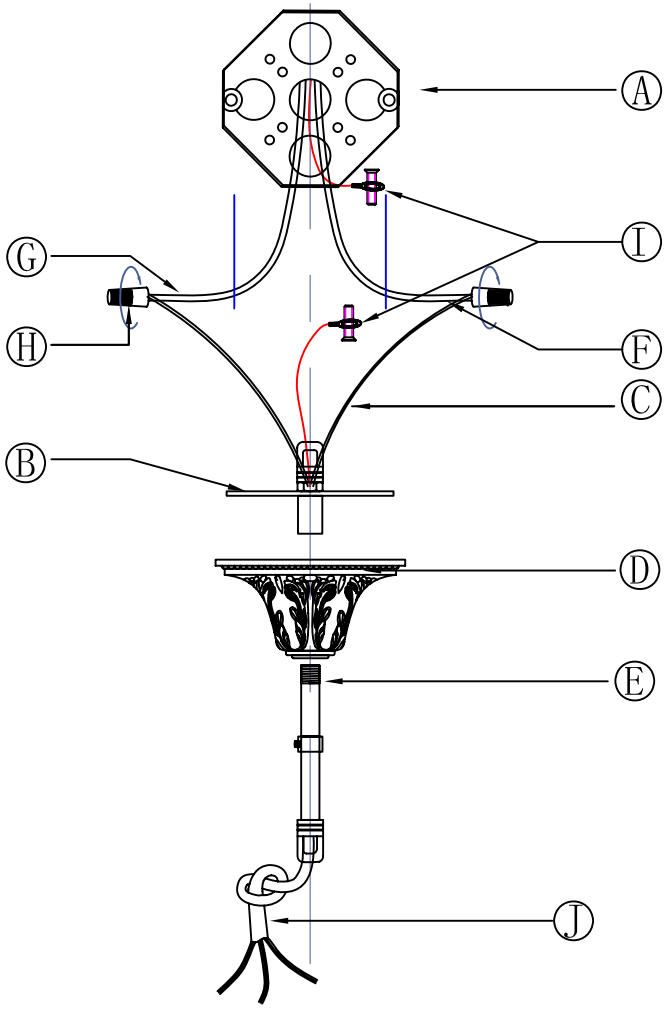

Frame Parts List



03-Crossbar

04-Canopy

05-Chairs

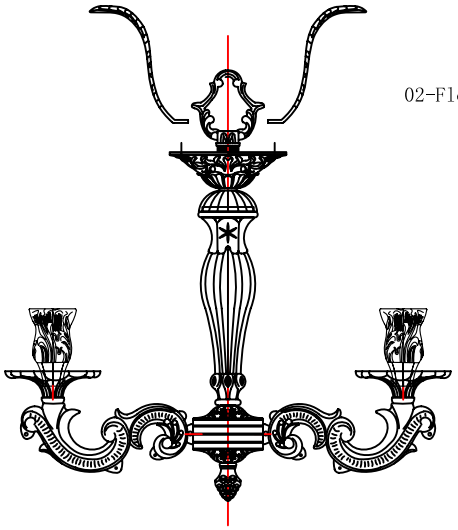

02-Flowers

01-Lamp Body

WARNING!!!

CONTENTS ARE FRAGILE
HANDLE WITH CARE

The metal frame and crystal components of this chandelier are very delicate. Please excersise extreme Caution during unpacking and installation.

WARNING!!!

After passing the main eiectrical wire through the 10mm pipe and connecting the pipe to the main body top connector, place all remaining pieces as shown in nurmerical order and in the orientation depicted. Refer to the parts list to avoid confusion between parts. The part Numbers coincide

CAUTION

1. Rated 110v-130v/60Hz, bulb E12/40W maximum.
2. Care Should be taken to avoid damage to the surface of lighting and wire, wearing gloves is recommended when installing
3. Connect black or red wire of the lighting to live wire and white or blue wire to neutral wire and double colored(or bare copper)wire to ground wire.
4. Never install lighting on damp ceiling, the room should be dry and well ventilated.
5. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with Clean soft cloth only.
6. Installation must be carried out by qualified electrician only.
7. Disconnect the power before installing, Ceaning and replacing lighting.
8. Never cover the lighting when power is connected.
9. Firmness must be secured when installing ceiling tube、chain、pipe and other connecting parts.
10. Care should be taken to avoid damage when installing glass parts.
11. All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes. Make sure that the elecrtrical supply to the chandellier is turned off at the main fuse or circuit breaker before doing any installation Worldwide lighting shall not be responsible for unprofessional wiring.

Crystal Dressing Diagram

When dressing the chandelier with the crystals please remember to wear either rubber or cotton gloves. So as to prevent any damage or smudging on the crystals.

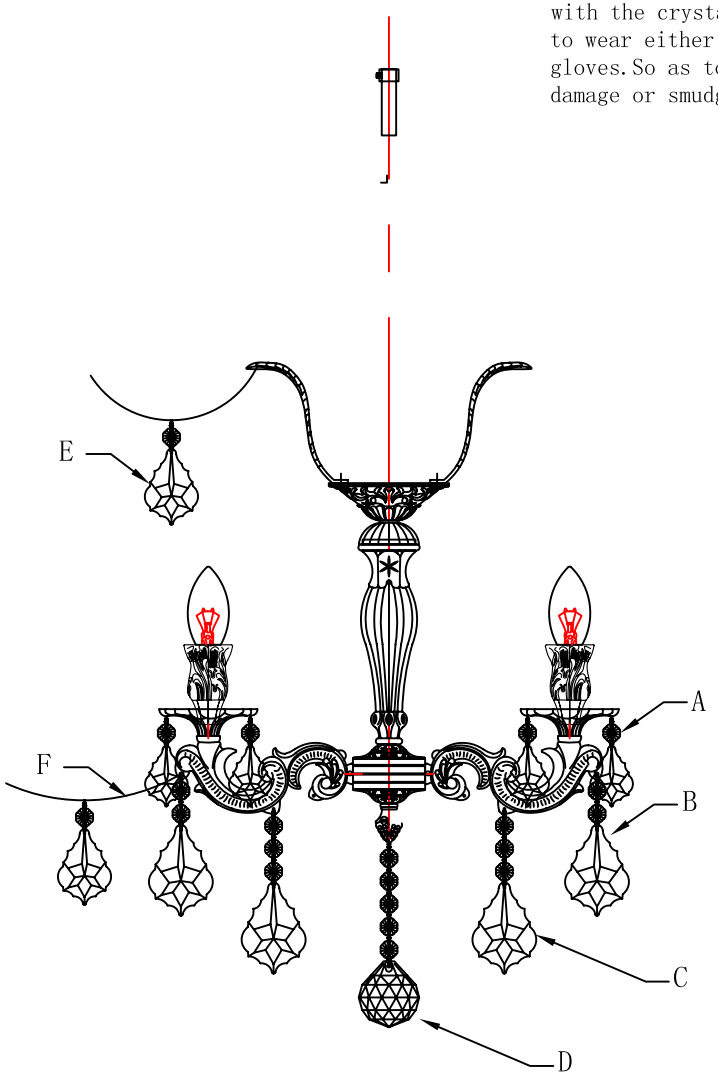

Frame Assembly Diagragram

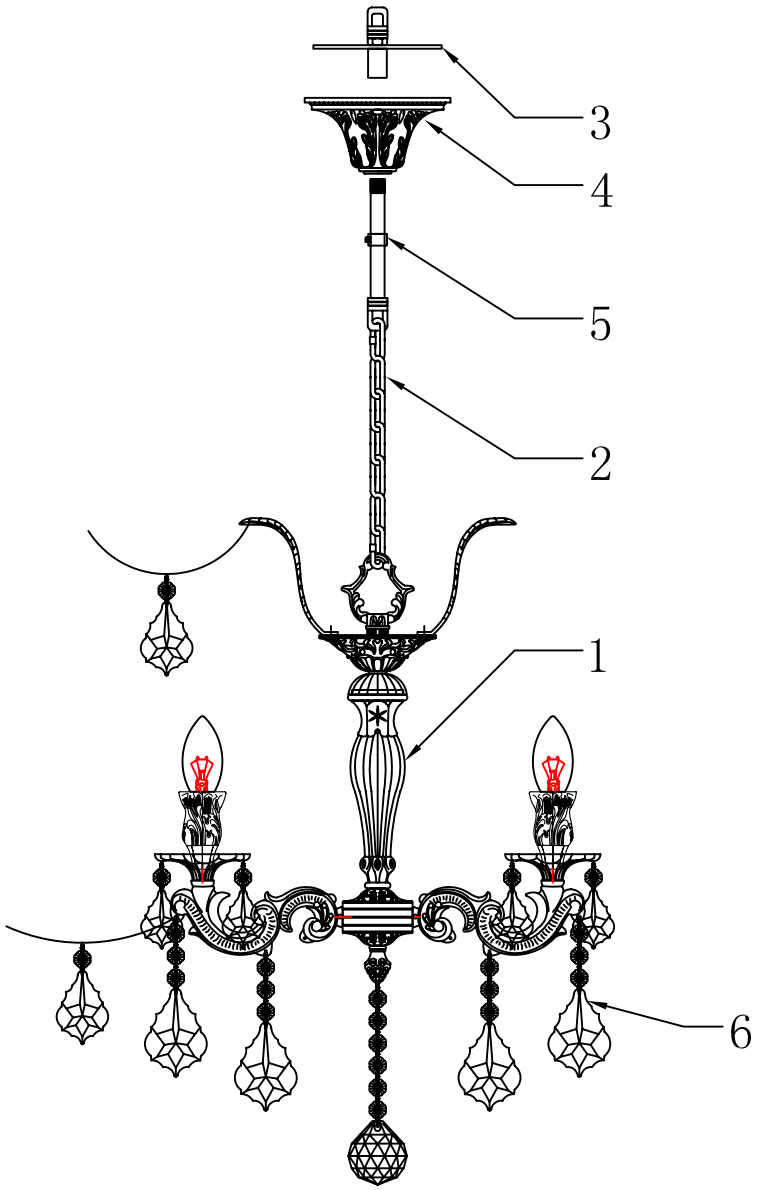

CANOPY INSTALLATION INSTRUCTIONS

Please read all instructions carefuly.Before you proceed to install,make sure that the power supply is turned off and off until installation is complete.Please note that each part has been asigned a letter.Please proceed in an alphabetical order.

A.Existing Electrical Box
B.Crossbar
C.Crossbar Screws
D.Metal Plate
E.Crossbar Bracket
F.Neutral Conductor
G.Hot Wire
H.Junction Caps
I.Ground Wire
J.Wire

Attach the Crossbar (B)to the existing electrical box(A)using the two crossbar screws(E)which are not supplied and should already be in your box.

WARNING!!!

CONTENTS ARE FRAGILE
HANDLE WITH CARE

The metal frame and crystal components of this chandelier are very delicate. Please excersise extreme Caution during unpacking and installation.

WARNING!!!

After passing the main eiectrical wire through the 10mm pipe and connecting the pipe to the main body top connector, place all remaining pieces as shown in nurmerical order and in the orientation depicted. Refer to the parts list to avoid confusion between parts. The part Numbers coincide

CAUTION

1. Rated 110v-130v/60Hz, bulb E12/40W maximum.
2. Care Should be taken to avoid damage to the surface of lighting and wire, wearing gloves is recommended when installing
3. Connect black or red wire of the lighting to live wire and white or blue wire to neutral wire and double colored(or bare copper)wire to ground wire.
4. Never install lighting on damp ceiling, the room should be dry and well ventilated.
5. Keep lighting away from acid, alkali and other corrosive chemical or gas, clean the lighting with Clean soft cloth only.
6. Installation must be carried out by qualified electrician only.
7. Disconnect the power before installing, Ceaning and replacing lighting.
8. Never cover the lighting when power is connected.
9. Firmness must be secured when installing ceiling tube、chain、pipe and other connecting parts.
10. Care should be taken to avoid damage when installing glass parts.
11. All electrical components must be installed by a licensed electrician and in accordance with the National Electrical Code and the appropriate local electrical codes. Make sure that the elecrtrical supply to the chandellier is turned off at the main fuse or circuit breaker before doing any installation World wide lighting shall not be responsible for unprofessional wiring.

Frame Assembly Instructions

Installation:
Please read all instructions carefully.
Before you proceed to install, make sure.
that the power supply is turned off and
remains off until installation is complete.
please note that each part has been assigned a number.
please proceed in a numerical order.

1. Install Flowers(02)on lamp body(01)
2. Install Crossbar with J-Box. and then Fixed the Canopy(04)
3. Join the lamp body(01) and crossbar(03) with chains(05)
4. Make sure the main wire is enough long and keep the rest wire in the 4″ J-box.
5. As the crystal pressing instruction, hang the crystal parts.
6. Install lighting Source

The end!